


Dimensional range according to EN 81-58 Swing landing door DT 37/2

Swing landing door DT37/2 shown

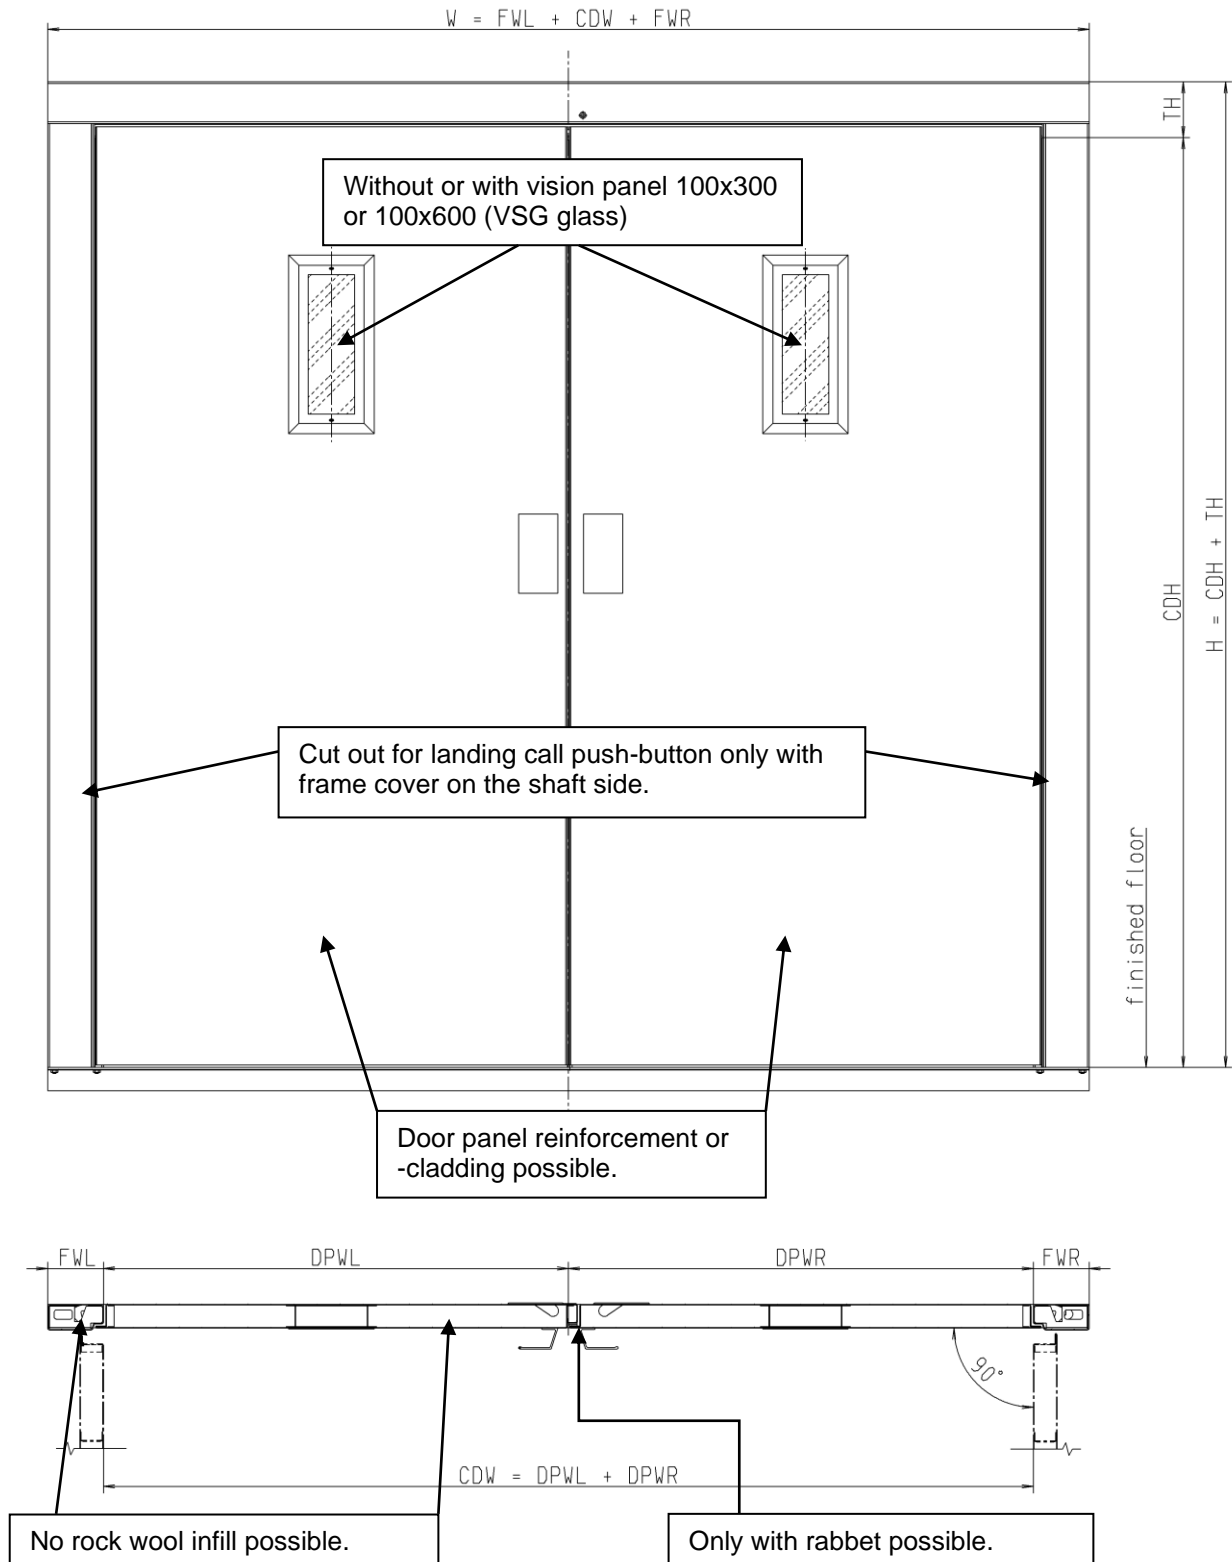

subject to modifications

Dimensions

		min. [mm]	E120 EW60 max. [mm]	E120 EW30 max. [mm]
CDW	Clear door width	1200 / 1000 ¹⁾	2000	2500
CDH	Clear door height	-	2300	2500
FWR	Frame width right	75	200	
FWL	Frame width left	75	200	
TH	Transom height TH	100	200	
DPWR(L)	Door panel width right (left)	600	1250	
W	Total width of the door	-	2400	2900
H	Total height of the door	-	2500	2700

Note:

Swing doors according classification EI not possible.

The door according to EN 81-58 is to be fixed in the masonry / concrete shaft (see installation instructions 8200 3006 219, section 11.1).

After installation the door in the masonry / concrete shaft, the resulting air gaps must be closed by approved materials according to DIN 4102-1 Fire behavior of building materials and elements Part 1: Building materials; class A.

1) Clear door width $1000 \leq TB < 1200$ mm only possible without vision panel.